

DATASHEET


4.3-10 DIN Socket for 1/2" Feeder

Spinner BN 431017



SPECIFICATIONS

Interface Type	4.3-10 socket MultiFit™ (50 Ω) per IEC61169-54
Frequency Range	DC to 6 GHz
VSWR, max.	1.02 @ DC to 1 GHz 1.03 @ 1 to 2,7 GHz 1.08 @ 2,7 to 3,8 GHz 1.1 @ 3,8 to 6 GHz
Degree of Protection	IP68 per EN 60529 (interface connected with appropriate gasket)
Weight, approx.	85 g

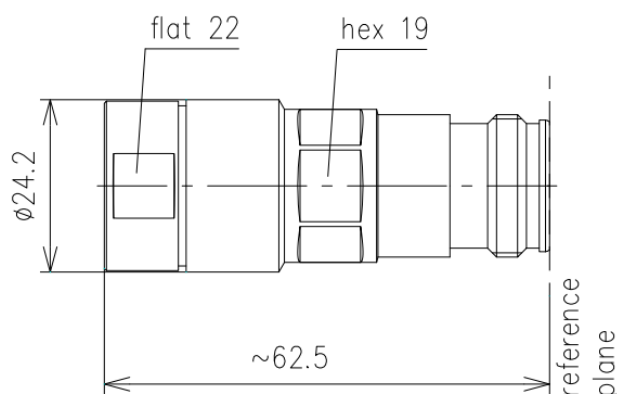

MATERIALS & PLATING

	Description	Material	Surface Plating
1	Inner Conductor	Copper Alloy	Silver
2	Outer Conductor	Copper Alloy	CuSnZn
3	Other Metal Parts	Copper Alloy Copper Alloy Copper Alloy	Bright Nickel Sn CuSnZn
4	Insulation	PTFE, PE	N/A
5	Sealing	Silicone Rubber EPDM	N/A

CABLE COMPATIBILITY

Spinner	SPINNERFlex™ LF1/2"-50
Acome	HPL50-1/2F
Andrew	LDF4-50A
Draka	RFA 1/2"-50
Eupen	EC4-50
Hansen	RF 50 1/2"
Hengxin	HCAAY-50-12
Leoni	FlexLine 1/2" R
LS Cables	HFC 12D Flexible Foam
RFS	LCF 12-50, LCF-50 L

Website: benelec.au