


DATASHEET

SKU: 0564221

Benelec 305m RG402 50 Ohm Coaxial Cable Spool

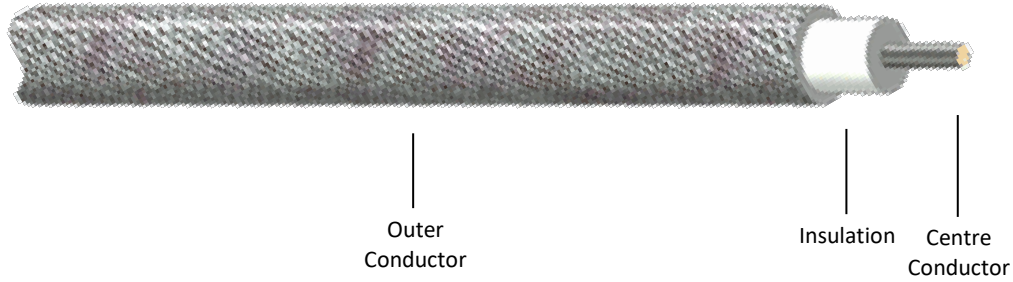

Semi-flexible Coax

Flame retardant	IEC 60332-1-2	UL 1581 VW-1
Smoke generation	IEC 61034-2	
Frequency range	Up to 18 GHz	
Screening efficiency	110dB	
Velocity propagation	70%	

Construction

Conductor	Centre conductor is SCCS (Silver plated Copper Coated Steel)
Shield(s)	Tin-soaked, Tin Plated Copper (TPC)
Dielectric	PTFE

SPECIFICATIONS

Conductor material	SCCS
Conductor \varnothing	0.94 mm
Dielectric \varnothing	2.95 mm
Shield \varnothing	3.58 mm
Weight	41 g/m
V rms	2,500 DC
Impedance	50 Ω
cap.	94 pF/m

PACKAGING

500m Wooden Spool

Website: benelec.au