



## DATASHEET

### 5G SPLITTER 4 WAY Ns

-160 dBc, SPINNER BN923065

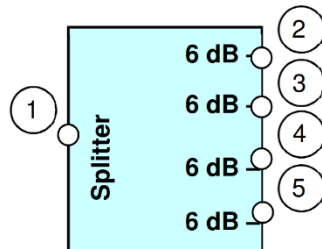


Block Diagram

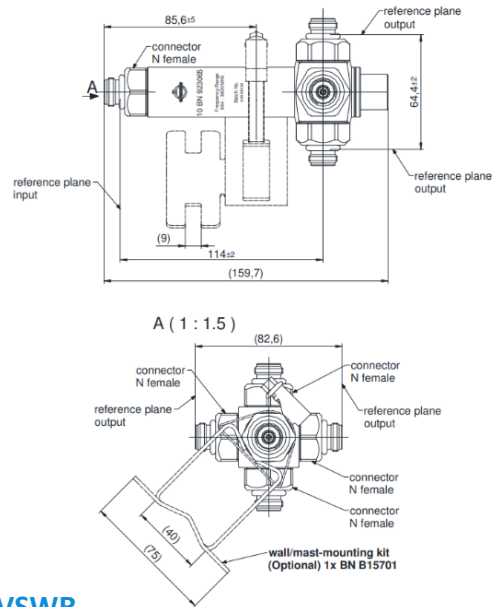

## SPECIFICATIONS

Splitting Ratio	1 : 0.25 : 0.25 : 0.25	
Connectors	N Female	
Frequency Range	Port 1	Input
	Port 2, 3, 4, 5	Output
Output Difference	≤ 0.5 dB	
Insertion Loss	≤ 6.2 dB	
Impedance	50 Ω	
VSWR	≤ 1.2 (Port 1)	
Phase Difference	≤ 5 °	
Power Rating	250 W CW	
Intermodulation Products	≤ -160 dBc   typical ≤ -165 dBc	
3 <sup>rd</sup> Order @ 2 x 20 W		
Degree of Protection Mated / 1 bar, 1 h, ≤ 18 °C	IP 68	
Class of Environmental Conditions	ETSI EN 300019-1-1 Class 1.2 ETSI EN 300019-1-2 Class 2.3 ETSI EN 300019-1-4 Class 4.1E	
Operating Temperature	-40 °C to +85 °C	
Wall/Mast Mounting	To be ordered separately	
Weight	0.55 kg	
Dimensions (WxHxD)	82.6 mm x 159.7 mm x 82.6 mm	

## VSWR

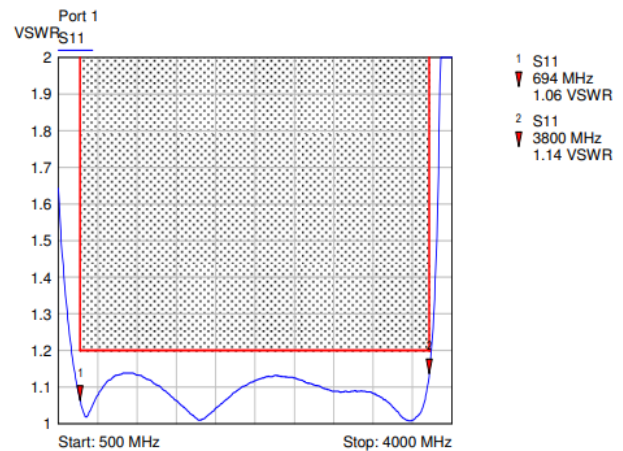

## INSERTION LOSS

