

DATASHEET

SKU: 10334ZA

Benelec 4 Way UHF Band Phasing Harness 360-520MHz, N Socket




The 10334ZA phasing harness is a four-way cable power divider intended for the coupling of two UHF side mount dipoles, such as Benelec O2680A. It comes with a female input connector and two female output connectors. It affords a wide bandwidth, matching that of the four-stack array.

FEATURES

- Wide bandwidth
- Medium Power
- Quality connectors
- Plated brass components

VSWR

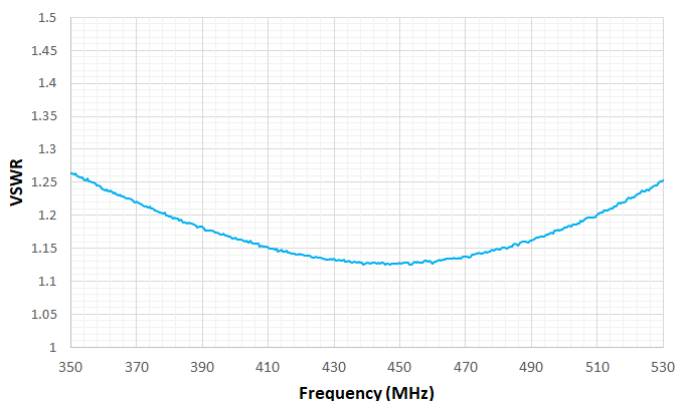

ELECTRICAL SPECIFICATIONS

VSWR	<1.25:1 @ 360 - 520MHz
Impedance	50 Ohms nominal
Power Rating	200 Watts
Cable	RG11
Termination	N Female input/N female outputs

MECHANICAL SPECIFICATIONS

Base Materials	Chromed Brass
Length	1120 mm output to output

PACKAGING

Poly Bag PVC

WARRANTY

12 months (Please refer to [Benelec Terms & Conditions](#))

Website: benelec.au